


# CECOMefiag

Built stronger to last longer

- ▶ Fitted with self-priming magnetic drive pump!
- ▶ Capacity up to 15 m<sup>3</sup> per hour
- ▶ Filter assembly can be removed in its entirety
- ▶ Large sludge holding capacity
- ▶ Easy to operate
- ▶ Operation temperatures up to 80° C.



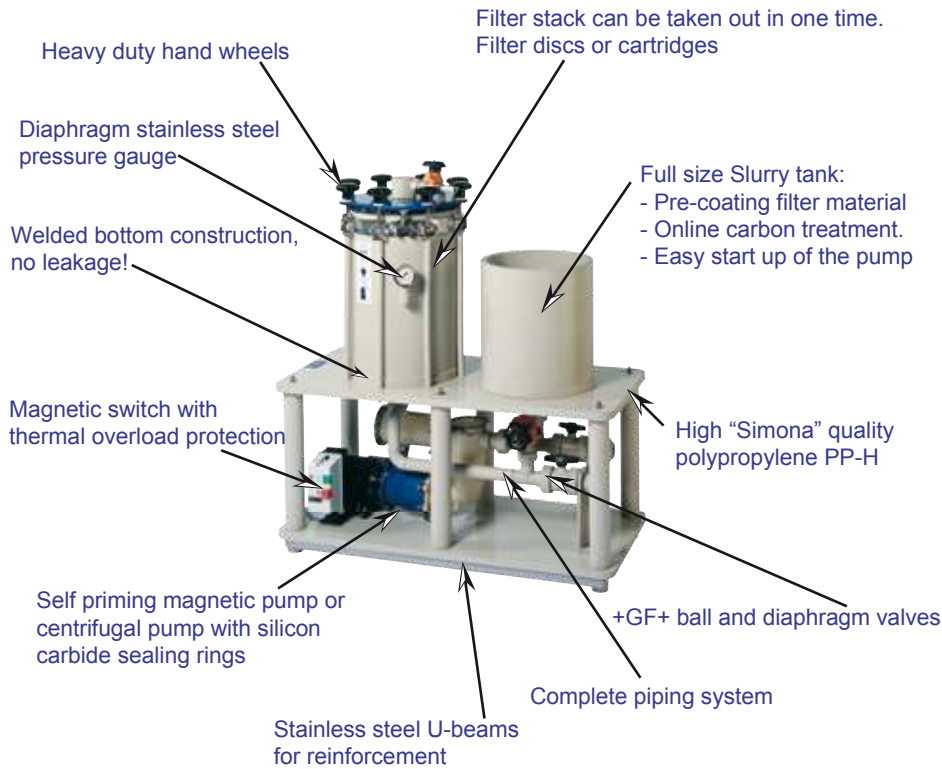

SP-20-CRS



2500-MP-10Q




MP-10Q



Cartridge filter assembly



Disc filter assembly

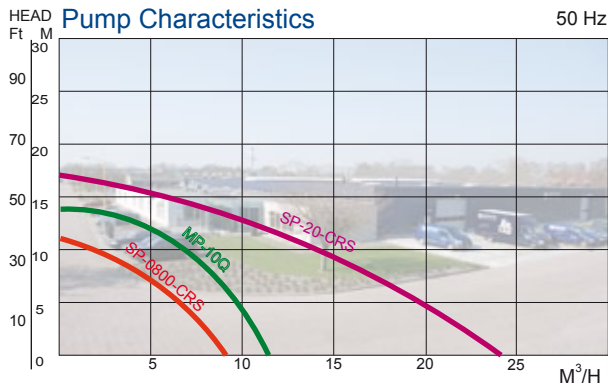

The filter units from this series are easy to operate and standard equipped with a self-priming magnetic pump and have capacities up to 18.000 litres per hour. Depending on the requirements, alternative pumps are available.

Pump	Capacity	kW.	Voltage	Amps.
SP-0800-CRS	8m <sup>3</sup> /h	0,75	230/400	3,0/1,75
MP10Q	10m <sup>3</sup> /h	0,75	230/400	3,0/1,7
SP-20-CRS	18m <sup>3</sup> /h	1,5	230/400	6,1/3,5

	2500 Disc Filter	3500 Disc Filter	3500 Cartridge Filter
Max. temperature	70 <sup>0</sup> /90 <sup>0</sup> C*	70 <sup>0</sup> /90 <sup>0</sup> C*	70 <sup>0</sup> /90 <sup>0</sup> C*
Disc dimension	294/64 mm	294/64 mm	
Number of filter discs	40	48	
Capacity	10m <sup>3</sup> /hour	15m <sup>3</sup> /hour	15m <sup>3</sup> /hour
Filter medium	paper / cloth	paper / cloth	
Filter surface area	2,6m <sup>2</sup>	3,1m <sup>2</sup>	
Sludge holding capacity			
Filter cartridge			Polypropylene 20" - 10μ
Number of filter cartridges			12
Content filter housing	43 litres	51 litres	51 litres
Content slurry tank	31 litres	39 litres	39 litres
Length	925 mm	925 mm	925 mm
- with slurry tank	1095 mm	1095 mm	1095 mm
Width	498 mm	498 mm	498 mm
Height	1067 mm	1158 mm	1158 mm

Inlet:	d32 / DN25 to d50 / DN40*	Outlet:	d32 / DN25 to d50 / DN40*
Drain:	d25 / DN20	Air-release:	d20 / DN16

Information in this leaflet can be subject to change without prior notice

\* = depending on pump selection